


SHIELD

TECHNICAL PARAMETERS

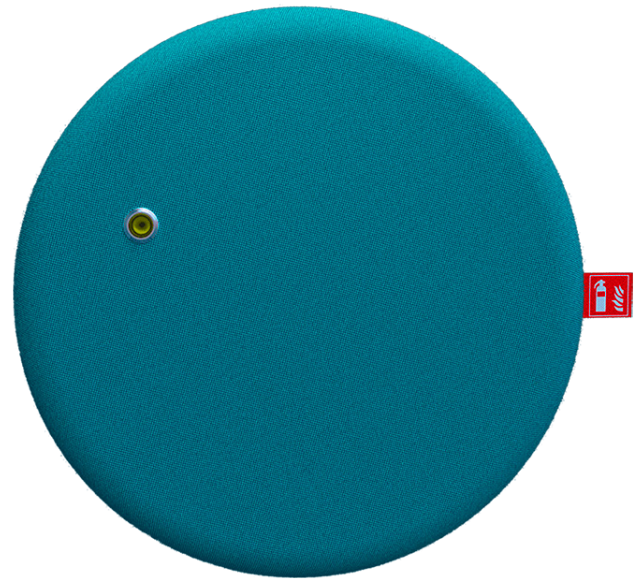

Ampla SHIELD Powder fire extinguisher

T162P4VSS

FIRE RATING:	21A, 113B, C
USE:	Solid materials, liquids, gases, live electrical equipment up to 1kV at the distance of 1m
TOTAL WEIGHT:	~ 11.4 kg
OVERALL DIMENSIONS:	Diameter - 630 ±2 mm Width - 91 ±2 mm
BODY VOLUME:	7.2 l
ALLOWABLE TEMP.:	-30°C / +60°C
EXTERNAL TREATMENT:	Powder painting red – RAL 3000
EXTINGUISHING AGENT:	Powder – Furex ABC Spezial (NH ₄) ₂ SO ₄ 68.5%, (NH ₄)H ₂ PO ₄ 21.5%
WEIGHT OF EX. AGENT:	~ 4 kg
PROPELLANT:	Nitrogen N ₂ 100%
DISCHARGE TIME:	14.1 ±2.1 s
BODY MATERIAL:	Alloy steel – P265GH
VALVE:	Chrome-plated brass – M45x1.5
TRIGGER:	ABS – red
MAX. ALLOWABLE PRESSURE:	17 bar
TEST PRESSURE:	25 bar
CERTIFIED ACCORDING TO:	EN 3-7:2004+A1:2007 EN 3-8:2006/AC:2007 EN 3-10:2010
CERTIFICATE:	202-173-B-00512-22 1015-PED-B-00531-22

T162P6VSS

FIRE RATING:	34A, 183B, C
USE:	Solid materials, liquids, gases, live electrical equipment up to 1kV at the distance of 1m
TOTAL WEIGHT:	~ 13.2 kg
OVERALL DIMENSIONS:	Diameter - 630 ±2 mm Width - 91 ±2 mm
BODY VOLUME:	7.2 l
ALLOWABLE TEMP.:	-30°C / +60°C
EXTERNAL TREATMENT:	Powder painting red – RAL 3000
EXTINGUISHING AGENT:	Powder – Furex ABC Spezial (NH ₄) ₂ SO ₄ 68.5%, (NH ₄)H ₂ PO ₄ 21.5%
WEIGHT OF EX. AGENT:	~ 6 kg
PROPELLANT:	Nitrogen N ₂ 100%
DISCHARGE TIME:	19.6 ±2.9 s
BODY MATERIAL:	Alloy steel – P265GH
VALVE:	Chrome-plated brass – M45x1.5
TRIGGER:	ABS – red
MAX. ALLOWABLE PRESSURE:	17 bar
TEST PRESSURE:	25 bar
CERTIFIED ACCORDING TO:	EN 3-7:2004+A1:2007 EN 3-8:2006/AC:2007 EN 3-10:2010
CERTIFICATE:	202-173-B-01277-22 1015-PED-B-01279-22